



# LORING

The Smarter Way to Roast

## LORING™ S15 Falcon™

Automated 15 kg Roaster





### INCLUDES

- Touchscreen interface
- Green bean vacuum lift
- Automation software with auto-charge and discharge of beans
- High speed cooling tray with paddle stirring
- 3-15 kg batch capacity

### OPTIONAL

- Destoner
- Green bean cart with scale

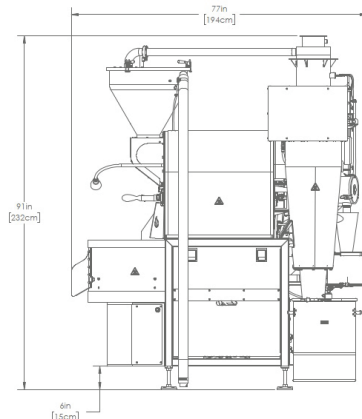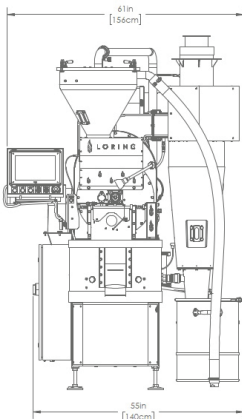

### ROASTER SPECIFICATIONS

Maximum Batch Size	33 lb (15 kg)
Minimum Batch Size	6.6 lb (3 kg)
Nominal Electrical Power	3.26 kW
Peak Electrical Power	4.33 kW
Maximum BTU Rating	133,000 BTU/h (34,000 kcal/h)
Stack Temp Continuous <sup>1</sup>	1,400°F (760°C)
Stack Temp Intermittent <sup>2</sup>	1,600°F (870°C)
Stack Flow Continuous	22 dscfm (37 dsm <sup>3</sup> /h)
Stack Max Flow (Peak Air Cool)	250 dscfm (425 dsm <sup>3</sup> /h)
Stack Duct Diameter (Minimum)*	6 in (152 mm)
Cooler Vent Max Flow	725 scfm (1,230 sm <sup>3</sup> /h)
Cooler Duct Diameter*	6 in (152 mm)
Water Supply	1 GPM (4 liter/min)
Water Pressure	50 psi (345 kPa)
Natural Gas Pressure	4-7 in WC (1.0-1.7 kPa)
Propane Gas Pressure	11-13 in WC (2.7-3.2 kPa)
Weight	1,335 lb (606 kg)

\*Larger stack diameters may be required based upon stack geometry

<sup>1</sup> Loring defines the continuous temperature rating as the temperature which the machine can reach and maintain when roasting at the high end of its capability.

<sup>2</sup> Loring defines the intermittent temperature rating as the maximum temperature that the machine cannot exceed during a roast.



# SUPERIOR IS OUR STANDARD.

Engineered for a roasting experience like no other, every Loring machine gives you unmatched quality, unheard-of efficiency, and unparalleled control.

## UNMATCHED QUALITY.

- Designed and made in U.S.A.
- Constructed by skilled craftsmen.
- Stainless steel construction.
- ISO 9001:2015 certified.

## UNPARALLELED CONTROL.

- Touch screen and PID provide operation of burner and fan speeds.
- Profiles can be saved and repeated consistently.
- Fully automated roasting process.

## UNHEARD-OF EFFICIENCY.

- Single burner roasts beans and incinerates smoke.
- High-speed cooling tray reduces cooling time while protecting beans.
- Up to 80% fuel-savings and reduction of greenhouse gases in every roast, compared to conventional roasters.

## Contact Us

### Loring Smart Roast, Inc.

Santa Rosa, CA  
+1 707 526 7215  
sales@Loring.com  
www.Loring.com

### North America, Latin America

ZENDEUS  
San Francisco, California  
+ 1 415 374 9097  
duncan.elcombe@zendeus.com

### Australia, New Zealand

CT ROASTING SOLUTIONS  
Adelaide, South Australia  
+61 400 250 598  
lachlan@ctroastingsolutions.com.au

### India

ANURATI  
Bangalore, India  
+91 98455 78935  
srinivas@anurati.ch

### Thailand

UCC K2 COMPANY LTD.  
Bangkok, Thailand  
+66 2276 5170  
sales@ucck2.co.th

### Southeast Asia

BARISTA JAM  
+6684 644 3344  
Meechoke@BaristaJam.coffee

### China (PRC), Hong Kong

SHANGHAI FORTUNECAFFE CO.  
Shanghai, China  
+86 21 6249 9786  
sales@fortunecaffe.com

### Japan, Taiwan

DCS CO., LTD  
Osaka, Japan & Taipei, Taiwan  
+81 798 35 2980  
info@dcservice.co.jp & www.dcs-asia.com

### Korea

M.I. COFFEE CORPORATION  
Seoul, South Korea  
+ 82 592 0167  
mi@micoffee.co.kr

### Europe, Middle East, Africa

THE COFFEE ROASTING COMPANY APS  
Copenhagen, Denmark  
+45 3023 8775  
jht@thefactorycoffee.eu

**SCHEDULE A DEMO OR REQUEST A QUOTE AT LORING.COM**



© 2025 Loring Smart Roast, Inc.  
The following are trademarks of Loring Smart Roast, Inc.: Loring, The Smarter Way to Roast, S7 Nighthawk, S15 Falcon, S35 Kestrel, S70 Peregrine and the flame symbol. 1002695 Rev. H